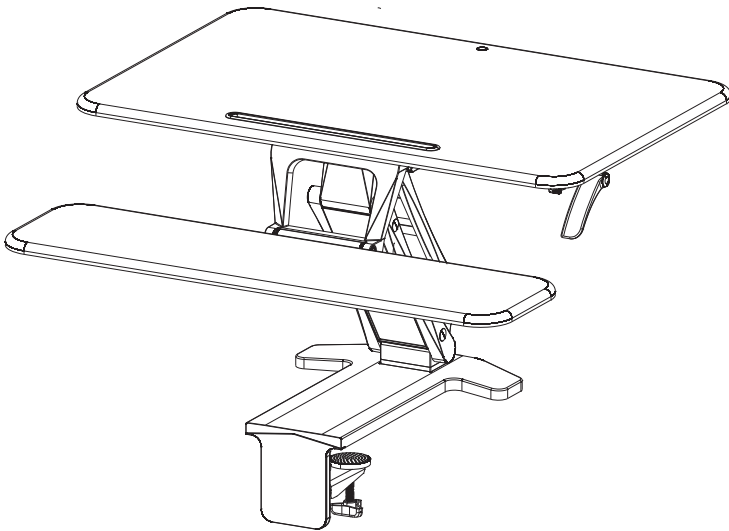# *ofm*
Furniture For The Real Office™

INSTALLATION GUIDE
Models 5200S/5200M Sit-to-Stand Workstation


⚠ CAUTION

Please read all instructions carefully and thoroughly before using this product. Please keep this manual and all instructions for future reference. The specifications for this product may vary slightly from the illustrations and are subject to change without prior notice.

Technical Data

⚠ WARNING	DO NOT exceed the maximum load-bearing capacity

Max 33.1 lb
A
0-80°
Max 4.4 lb
C
0-55°
B
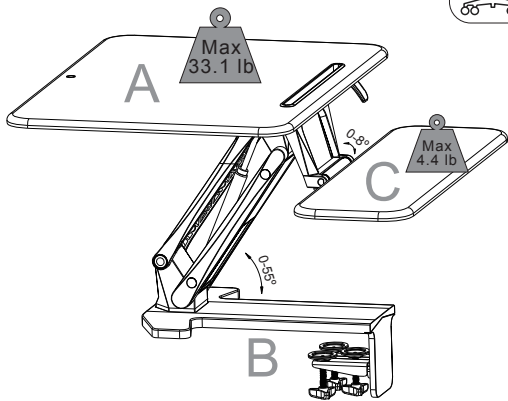
Keyboard tray load-bearing:	Max: 4.4 lb
Height range:	6.50-16.73 in
Desktop load-bearing:	Max: 33.1 lb

Accessory Package List

Note: The illustrations below are for reference only and may differ slightly from the actual part. If you have trouble with installation or are missing parts, please contact customer service immediately so we can remedy the problem quickly.

A	B	C	D	E
x1	*x1*	*x1*	*x4*	*x1*
Main structure	Base	Keyboard tray	Hexagon socket button head screw M6x25mm	Allen key 4x4mm

F				
F1 *x4* F2 *x2*				
Sticker				

ASSEMBLY STEP 1: Remove all contents from the packaging and place onto sturdy table. Please ensure all parts have been removed from package and inspect for shipping damage.

CAUTION
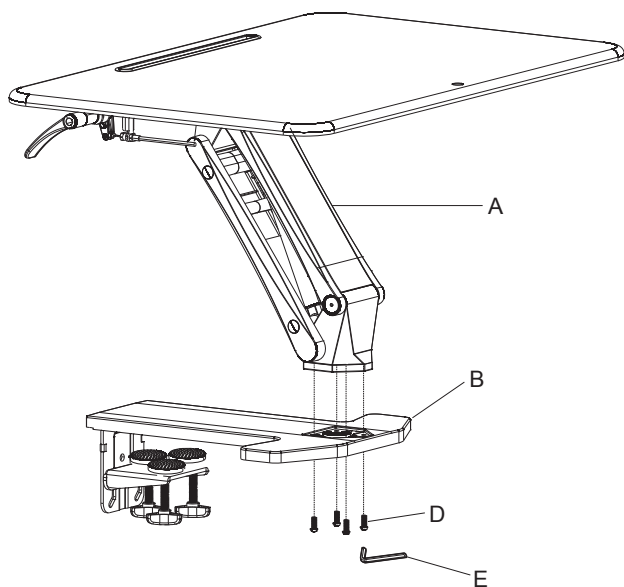
Bracket will raise promptly when the handle is pressed
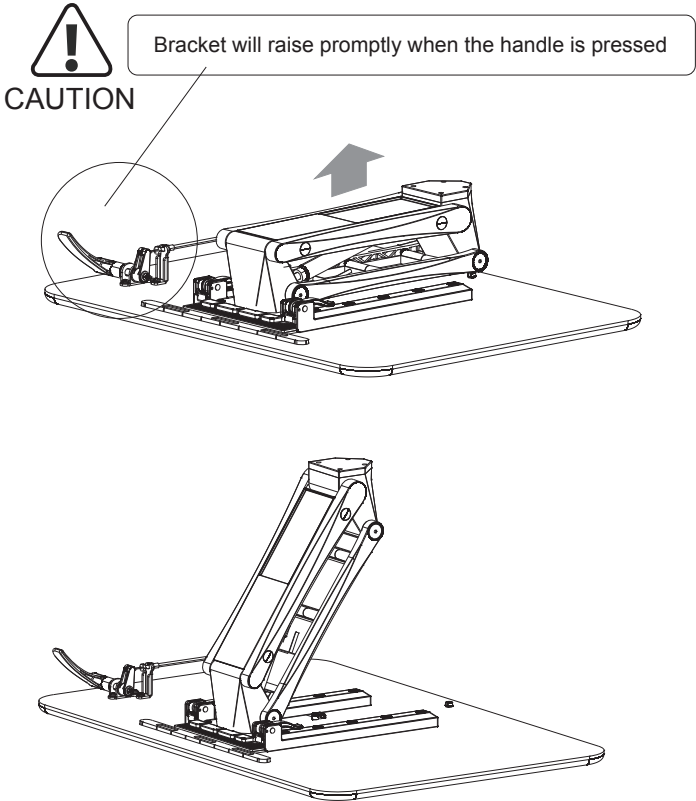
⚠ CAUTION

Ensure the workstation is centered on a flat, level surface before operating

ASSEMBLY STEP 2:
1. Attach main structure (A) to the base (B).
   - Using the Allen key (E), attach the main structure to the
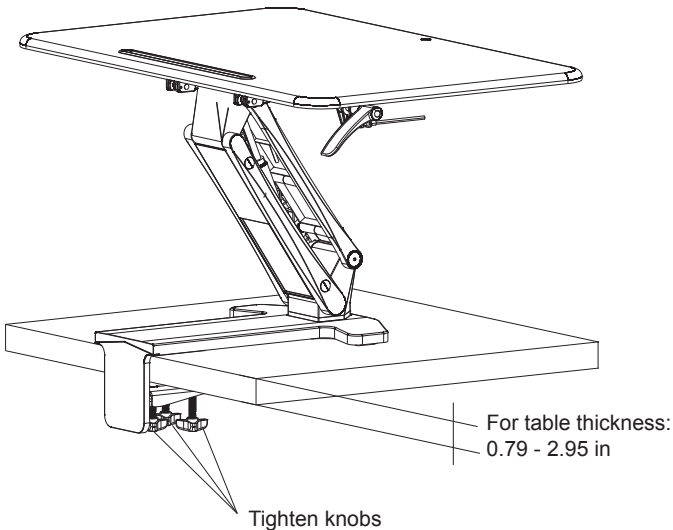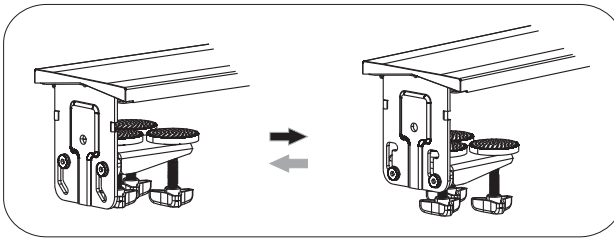   base with the 4 screws (D) provided.

A

B

D

E

To avoid injury, please do not lift
or move workstation by yourself.

ASSEMBLY STEP 3: Stand the entire assembled workstation and secure to the table by tightening knobs (provided).

Please adjust the clamping range of the knobs according to the thickness of table.
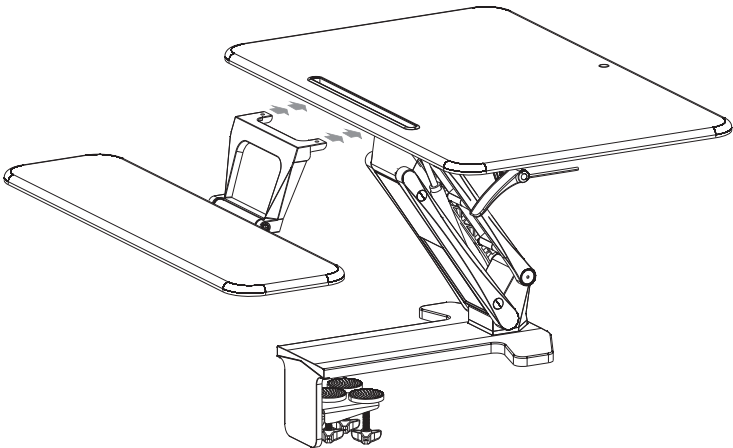

For table thickness:
0.79 - 2.95 in

Tighten knobs

ASSEMBLY STEP 4: Install the keyboard tray to the main structure.
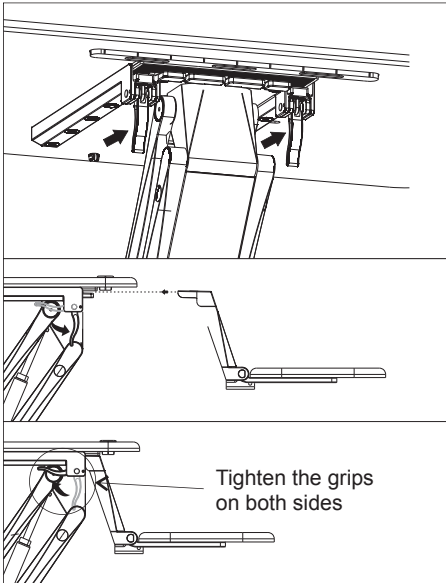
Please attach or detach the tray
based on the actual usage.
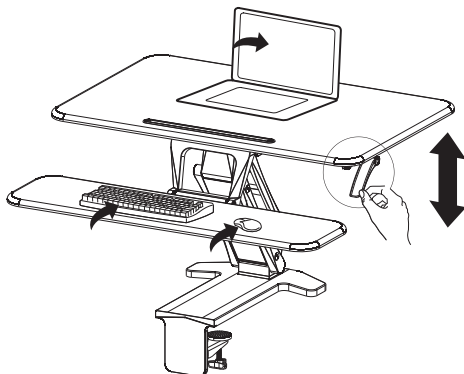
1

2

Open the grips on both sides

Install the keyboard tray

Tighten the grips
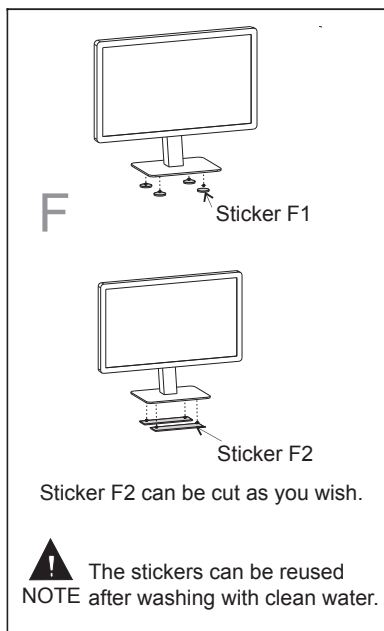on both sides

Tighten

Grips

Open

ASSEMBLY STEP 5

Place your devices onto the top of the workstation.

To operate the workstation, press the handle and raise or lower the top to desired height.

Attach the stickers to the bottom of your monitor.

6.50 - 16.73 in

8°

0

8°

0

Adjusting method: move the adjustment block, adjust the tray angle

F

Sticker F1

Sticker F2

Sticker F2 can be cut as you wish.

⚠ **NOTE** The stickers can be reused after washing with clean water.
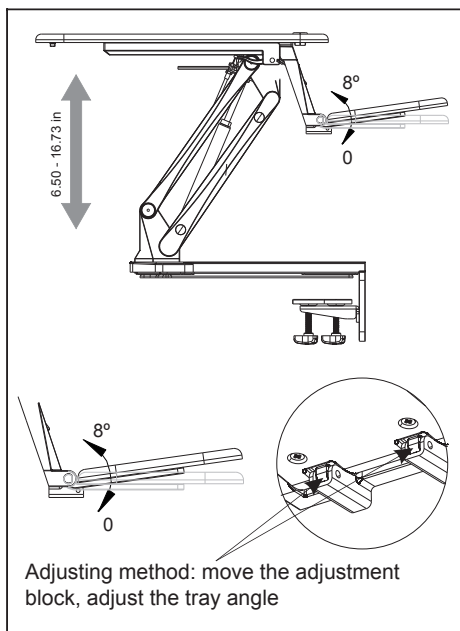
⚠ ATTENTION

DO NOT place equipment or devices near the edges of the workstation to avoid damage or injury.

⚠ CAUTION

| ⚠ WARNING |
| :---: |
| Pinching Hazard. Strut's angle will change during the desktop lifts and it may cause injury. |

Please DO NOT put hands, wiring or other objects on or near the support bars, as they move while adjusting table, and may cause injury or damage.
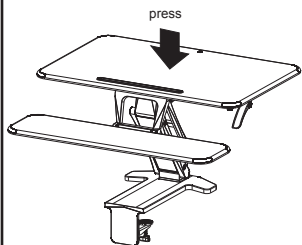
⚠ CAUTION

Please ensure all equipment/accessories are firmly attached to the table, and do not hang over table edge as this may cause harm or damage.

⚠ CAUTION

Adhesive buckle is provided for cable management. Please ensure adequate cable length allows for the desired range of table adjustment/movement.

⚠ CAUTION

press

To prevent the tabletop bouncing and any property loss or personal injury, please press the handle to give the desktop downward force when you need to adjust the height while the object on the table is less than 6.6 lb.

⚠ CAUTION

This product contains small items that could be a choking hazard. Keep away from young children.
• Make sure to read the instructions before installation
• Safety gear and proper tools must be used. Failure to use safety gear can result in property damage, serious injury or death.
• Check joint parts every two months to ensure screws are not loosened.
Note: this product is intended for indoor use only.